

HOTEC

HAND DRYER

PUSH-BUTTON

HIFLOW



Reference: 11.214
steel
white enamelled coating



Reference: 11.215
AISI 304 stainless steel
brigh



Reference: 11.216
AISI 304 stainless steel
satin

COMPONENTS & MATERIALS

- One-piece cover.
- High speed brush motor.
- Strong, vandal proof and build without edges.
- Universal brush motor incorporating a safety thermal cut-off.
- Element incorporates a safety thermal cut-off.
- Aluminium centrifugal double inlet fan wheel.
- 360° revolving nozzle in chrome-plated zamak.
- Easy maintenance.
- Dimension: 232 high x 258 wide x 200 deep mm.


TECHNICAL SPECIFICATIONS

· Material	steel or AISI 304 stainless steel
· Cover thickness	1.0 mm thick
· Voltage/Frequency	AC220V, 50/60Hz
· r.p.m.	5800
· Total power	2300W
· Motor power	200W
· Consumption	10A
· Air velocity	22m/s
· Air temperature	45-70°C
· Noice level	75dB
· Protection level	IPX1

CERTIFICATE



TECHNICAL DRAWING

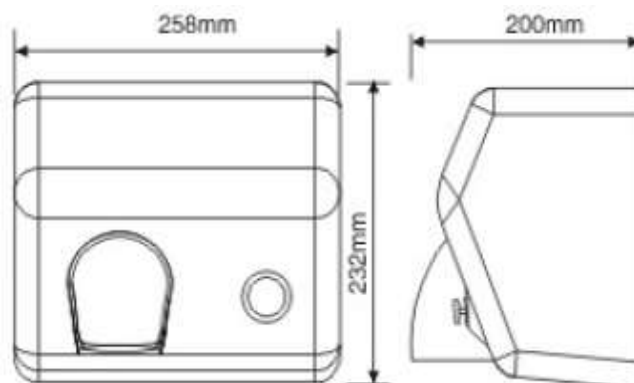

Tel: +86 571 888 685 70

hotec@cnhotec.com

Fax: +86 571 888 685 71

www.cnhotec.com