



# Hair Dryers

Different solutions for unique settings

## **UNIQUE POINTS**


- Long-lasting, compact units with anti-vandalism features.
- Minimum maintenance.
- High air velocity to ensure quick drying.
- High air velocity which permits a short drying time.
- Safety system which disconnects the dryer after 15 minutes of continuous working.
- Isolated tube and handle.
- Comfortable use by a ABS handset with thermal isolation for comfortable use at all times.
- First class component quality

To be installed in hotel rooms

CE CB RoHS


### 12.101

material: ABS  
finish: white




### 12.201

material: ABS  
finish: white



### 12.202

material: ABS  
finish: white



#### COMPONENTS & MATERIALS

- The element includes a safety thermal cut-off.
- Turn on automatically on unhooking the hand piece.
- White ABS thermoplastic hand piece.
- Speed selector with two settings.

- **12.101 12.201**  
• Two sockets for shaver, 110V and 220V.
- **12.101**  
• Extendable white polyurethane tube.

#### TECHNICAL SPECIFICATIONS

12.101	12.201	12.202																																																												
<table border="1"> <tr><td>Total Power</td><td>800W</td></tr> <tr><td>Motor power</td><td>50W</td></tr> <tr><td>Voltage</td><td>220–240V</td></tr> <tr><td>Frequency</td><td>50/60Hz</td></tr> <tr><td>Protection level</td><td>IPX1</td></tr> <tr><td>Protect time</td><td>5min</td></tr> <tr><td>Air temperature</td><td>65 ± 15°C</td></tr> <tr><td>r.p.m.</td><td>11000</td></tr> <tr><td>Air velocity</td><td>&gt; 10m/s</td></tr> <tr><td>Noice level</td><td>&lt; 70dB</td></tr> </table>	Total Power	800W	Motor power	50W	Voltage	220–240V	Frequency	50/60Hz	Protection level	IPX1	Protect time	5min	Air temperature	65 ± 15°C	r.p.m.	11000	Air velocity	> 10m/s	Noice level	< 70dB	<table border="1"> <tr><td>Total Power</td><td>1200W</td></tr> <tr><td>Motor power</td><td>30W</td></tr> <tr><td>Voltage</td><td>220V</td></tr> <tr><td>Frequency</td><td>50/60Hz</td></tr> <tr><td>Protection level</td><td>IPX1</td></tr> <tr><td>Protect time</td><td>5min</td></tr> <tr><td>Air temperature</td><td>65 ± 15°C</td></tr> <tr><td>r.p.m.</td><td>12700</td></tr> <tr><td>Air velocity</td><td>13m/s</td></tr> <tr><td>Noice level</td><td>&lt; 73dB</td></tr> </table>	Total Power	1200W	Motor power	30W	Voltage	220V	Frequency	50/60Hz	Protection level	IPX1	Protect time	5min	Air temperature	65 ± 15°C	r.p.m.	12700	Air velocity	13m/s	Noice level	< 73dB	<table border="1"> <tr><td>Total Power</td><td>1200W</td></tr> <tr><td>Motor power</td><td>30W</td></tr> <tr><td>Voltage</td><td>220V</td></tr> <tr><td>Frequency</td><td>50/60Hz</td></tr> <tr><td>Protection level</td><td>IPX1</td></tr> <tr><td>Protect time</td><td>5min</td></tr> <tr><td>Air temperature</td><td>65 ± 15°C</td></tr> <tr><td>r.p.m.</td><td>10000</td></tr> <tr><td>Air velocity</td><td>13m/s</td></tr> <tr><td>Noice level</td><td>&lt; 73dB</td></tr> </table>	Total Power	1200W	Motor power	30W	Voltage	220V	Frequency	50/60Hz	Protection level	IPX1	Protect time	5min	Air temperature	65 ± 15°C	r.p.m.	10000	Air velocity	13m/s	Noice level	< 73dB
Total Power	800W																																																													
Motor power	50W																																																													
Voltage	220–240V																																																													
Frequency	50/60Hz																																																													
Protection level	IPX1																																																													
Protect time	5min																																																													
Air temperature	65 ± 15°C																																																													
r.p.m.	11000																																																													
Air velocity	> 10m/s																																																													
Noice level	< 70dB																																																													
Total Power	1200W																																																													
Motor power	30W																																																													
Voltage	220V																																																													
Frequency	50/60Hz																																																													
Protection level	IPX1																																																													
Protect time	5min																																																													
Air temperature	65 ± 15°C																																																													
r.p.m.	12700																																																													
Air velocity	13m/s																																																													
Noice level	< 73dB																																																													
Total Power	1200W																																																													
Motor power	30W																																																													
Voltage	220V																																																													
Frequency	50/60Hz																																																													
Protection level	IPX1																																																													
Protect time	5min																																																													
Air temperature	65 ± 15°C																																																													
r.p.m.	10000																																																													
Air velocity	13m/s																																																													
Noice level	< 73dB																																																													



**12.203**

material: ABS  
finish: white



**12.204**

material: ABS  
finish: white



**12.205**


material: ABS  
finish: white

**COMPONENTS & MATERIALS**

- The element includes a safety thermal cut-off.
- Turn on automatically on unhooking the hand piece.
- White ABS thermoplastic hand piece.
- Speed selector with two settings.
- Two sockets for shaver, 110V and 220V.


**TECHNICAL SPECIFICATIONS**

**12.203**




Total Power	1200W
Motor power	30W
Voltage	220–240V
Frequency	50/60Hz
Protection level	IPX1
Protect time	5min
Air temperature	65 ± 15°C
r.p.m.	17000
Air velocity	> 12m/s
Noice level	< 73dB

**12.204**



Total Power	1200W
Motor power	30W
Voltage	220–240V
Frequency	50/60Hz
Protection level	IPX1
Protect time	5min
Air temperature	65 ± 15°C
r.p.m.	12700
Air velocity	13m/s
Noice level	< 70dB

**12.205**



Total Power	1200W
Motor power	30W
Voltage	220–240V
Frequency	50/60Hz
Protection level	IPX1
Protect time	5min
Air temperature	65 ± 15°C
r.p.m.	12700
Air velocity	>13m/s
Noice level	< 73dB


### 12.301

material: ABS  
finish: white



### 12.302

material: ABS  
finish: white

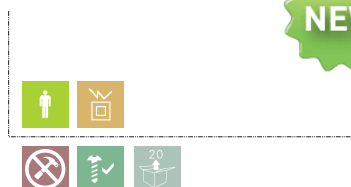


#### COMPONENTS & MATERIALS

- Highest electrical safety.
- Warm air hair dryer.
- Gun-like, high efficiency professional mini foldable hair dryer.
- Operated by an on/off switch.
- Small-size appliance, foldable handle for convenient storage.
- Two speed positions.
- Suitable for hotel bathrooms.
- Automatic over-heating protect system.


#### TECHNICAL SPECIFICATIONS

##### 12.301



Total power	1800W
Motor power	45W
Voltage/Frequency	AC220V, 50/60Hz
r.p.m.	17000
Protection level	IPX1
Electrical insulation	Class II
Air velocity	15m/s
Noice level	60dB

##### 12.302



Total power	1800W
Motor power	45W
Voltage/Frequency	AC220V, 50/60Hz
r.p.m.	17000
Protection level	IPX1
Electrical insulation	Class II
Air velocity	15m/s
Noice level	60dB



### 12.401

material: steel  
finish: white enamelled coating



### 12.411


material: steel  
finish: white enamelled coating

#### COMPONENTS & MATERIALS

- One-piece cover.
- High speed brush motor.
- Strong, vandal proof and build without edges.
- Universal brush motor incorporating a safety thermal cut-off.
- Element incorporates a safety thermal cut-off.
- Aluminium centrifugal double inlet fan wheel.
- 360° revolving nozzle in chrome-plated zamak.
- Easy maintenance.


#### TECHNICAL SPECIFICATIONS

##### 12.401

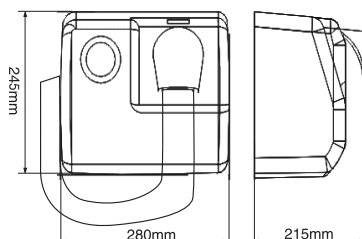

Total power	2300W
Motor power	250W
Voltage/Frequency	AC220V, 50/60Hz
Protection level	IPX1
Consumption	10A
Air temperature	50–80°C
r.p.m.	6200
Air velocity	23m/s
Noice level	<78dB

##### 12.411



Total power	2300W
Motor power	250W
Voltage/Frequency	AC220V, 50/60Hz
Protection level	IPX1
Consumption	10A
Air temperature	50–80°C
r.p.m.	6200
Air velocity	23m/s
Noice level	<78dB