HOTEC

HAND DRYER

SENSOR OPERATED

SMART







Reference: 11.261 ABS white

Reference: 11.262 304 stainless steel brigh

Material

r.p.m.

Total power

Motor power

Consumption

Air velocity

Noice level

Air temperature

Cover thickness

· Voltage/Frequency

Reference: 11.263 304 stainless steel

ABS or 304 stainless steel

2500

60W

7.2A

11 m/s

<70dB

IPX1

50-80°C

1650W

3.0/1.0 mm thick

AC220V, 50/60Hz

satin

TECHNICAL SPECIFICATIONS


- ·One-piece cover.
- ·High speed brush motor.
- ·Strong, vandal proof and build without edges.
- ·Induction motor incorporating a safety thermal cut-off.
- ·Electronic infrared detection sensor.
- ·PP aluminium centrifugal single inlet fan wheel.
- ·Cover fixed to the base by means of 2 screws.
- ·Dimension: 225 high x 282 wide x 160 deep mm.
- ·Dimension· 225 high x 282 wide x 147 deep mm

•]	Lasy	maintenance.	
-----	------	--------------	--

	·Dimension: 225 high x 282 wide x 147 deep mm.	· Protection level
	(ABS)	
CERTIFICATE		TECHNICAL DRAWING





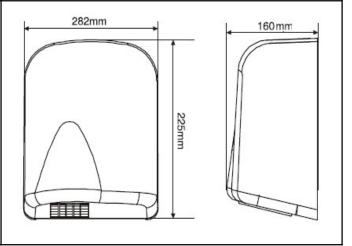

Tel: +86 571 888 685 70 hotec@cnhotec.com www.cnhotec.com

Fax: +86 571 888 685 71