

HAND DRYER

SENSOR OPERATED

CLASSICAL







Reference: 11.271 ABS white

Reference: 11.272 304 stainless steel brigh

Reference: 11.273 304 stainless steel

satin

COMPONENTS & MATERIALS

- ·One-piece cover.
- ·High speed brush motor.
- ·Strong, vandal proof and build without edges.
- ·Induction motor incorporating a safety thermal cut-off.
- ·Electronic infrared detection sensor.
- ·PP aluminium centrifugal single inlet fan wheel.
- ·Cover fixed to the base by means of 2 screws.
- ·Easy maintenance.
- ·Dimension: 265 high x 245 wide x 207 deep mm.

TECHNICIE SI ECHICATIONS	
· Material	ABS or 304 stainless steel
· Cover thickness	3.0/1.0 mm thick
· Voltage/Frequency	AC220V, 50/60Hz
· r.p.m.	5000
· Total power	2100W
· Motor power	150W
· Consumption	9.1A
· Air velocity	20m/s
· Air temperature	50-80°C
· Noice level	<75dB
· Protection level	IPX1


TECHNICAL SPECIFICATIONS

CERTIFICATE

TECHNICAL DRAWING





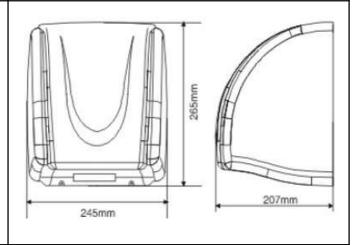

Tel: +86 571 888 685 70 hotec@cnhotec.com www.cnhotec.com

Fax: +86 571 888 685 71